


COMPACTION TOOLS

You can efficiently compact fill material with the same equipment you used to dig the trench. Use a quick-attach coupler, too, and maximize the time spent at the jobsite!

Compaction Plate

Model	Centrifugal Force lbs. (kN)	Hydraulic Requirement gpm (L/min)	Baseplate Size inches (mm)	Wt. lbs. (kg)
HC2	2500 (11)	7-9 (26-34)	11.5" x 20" (292 x 508)	300 (136)
HC3	3400 (15)	9-13 (34-49)	17.5" x 20.5" (445 x 521)	370 (168)
HC6	6400 (28)	9-13 (34-49)	23.25" x 24" (591 x 610)	850 (386)
HC8	8000 (35)	12-15 (45-57)	24" x 30" (610 x 762)	1070 (485)
HC11	11,350 (51)	30 (113)	27" x 28.5" (686 x 724)	1400 (635)

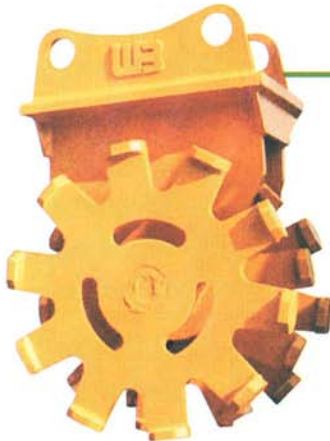

Compaction Wheel

Model	Width inches (mm)	Wheel Diameter inches (mm)	Number of Wheels	Wt. lbs. (kg)
CW12	12" (305)	30" (762)	2	750 (340)
CW18	18" (457)	30" (762)	3	900 (408)
CW24	24" (610)	30" (762)	3	1250 (567)
CW36	36" (914)	30" (762)	4	1400 (635)

Compaction Tools

When you need a solid, level surface, you need a compaction attachment. NA offers a wide variety of compaction plates and wheels for compact excavators.



Compaction Wheels. Maximize your equipment's efficiency with the compaction wheel. It is specifically designed to compact fill material in a trench as it is being filled.



Plate Compactor. Designed for extreme applications and built to deliver maximum vibratory force, plate compactors are available in vibratory force ranges from 2,500 lbs. to 11,350 lbs. Base plate widths range from 11" to 27" .

Vibratory Rollers. The smooth vibratory roller is a tough compaction tool for compacting sand, dirt, gravel, asphalt or backfill. The padded drum compacts cohesive clay-type materials easily. Smooth or padded drum versions are available in widths from 48" to 84" .



Smooth Drum Vibratory Roller



Padded Drum Vibratory Roller